



## DisPark®

### Indoor Parking Space Guidance Display



3-Way Indicator | 3-Colors | User Define | 1.5 Km Distance | ECO

DisPark® LED Display series brings you a new powerful way to display parking-related information. The display designs to be versatile in the application; it comprises a 64x32 resolution unit LED panel, which can expand to different display screen sizes and fonts according to actual application needs. Through a combination of Symbols, Arrows, Alphabets, and Digits available in the library, the parking lot manager can display parking information with ease. Using i-View's ParkHelper® Parking Management Server applications, you can easily configure the DisPark® LED Display layout of elements- dynamic and static, brightness, color, scrolling, and many other features. In addition, the signs can be easily adapted with any Parking lot application and display the information to guide the driver to find the parking space quickly.

#### Features

- Aluminum frame and organic glass panel designed to reduce the color decay of LED.
- The green LED indication and red Alphabets are clear and distinguishable, especially in the underground parking lot.
- Passed the static electricity, lightning, and surge reliability tests.
- Directions display defines by the user, satisfy the various crossroads applications.
- Changeable display messages suit multi-purpose applications.


#### Specification

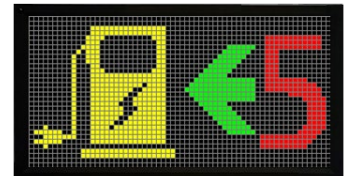


Item\Model	PSD-310D	PSD-210D	PSD-110D
<b>Text Display</b>	3 Arrows & 6 Digits or 48 Alphabets display	2 Arrows & 4 Digits or 32Alphabets display	1 Arrow&2 Digits or 8 Alphabets display
<b>Resolution   Brigness</b>	10000 Pixels/M <sup>2</sup>   1000 CB/M <sup>2</sup>		
<b>Protocol</b>	RS-485 Simplex		
<b>Distance</b>	Communication distance up to 1.5Km		
<b>ID Number</b>	255, ID number changes via software		
<b>Power Draw</b>	Maximum 20W (DC5V/4A)	Maximum 10W (DC5V/2A)	Maximum 5W (DC5V/1A)
<b>Operation</b>	Temperature -20° to +50° C (-4° to 122° F) ; Humidity 20%~80% (non-condensing)		
<b>Power input</b>	AC90V~ 260V/50~60Hz		
<b>Size / Weight</b>	962x 202 x 90 mm/ 2.8 Kg	660x 202 x 90 mm/ 2.1 Kg	355x 202 x 90 mm/ 1.1 Kg
<b>Housing   Mount</b>	Aluminum frame housing with acrylic plate		
<b>Installation</b>	Indoor use, support L-brackets bolted to the back of the housing for wall mount, ceiling mount, and pole mount.		
<b>Certification</b>	CE, RCC, RoSH		
<b>Mian Application</b>	Display the quantity and direction of empty parking spaces		

# Drawing


## PSD-310D

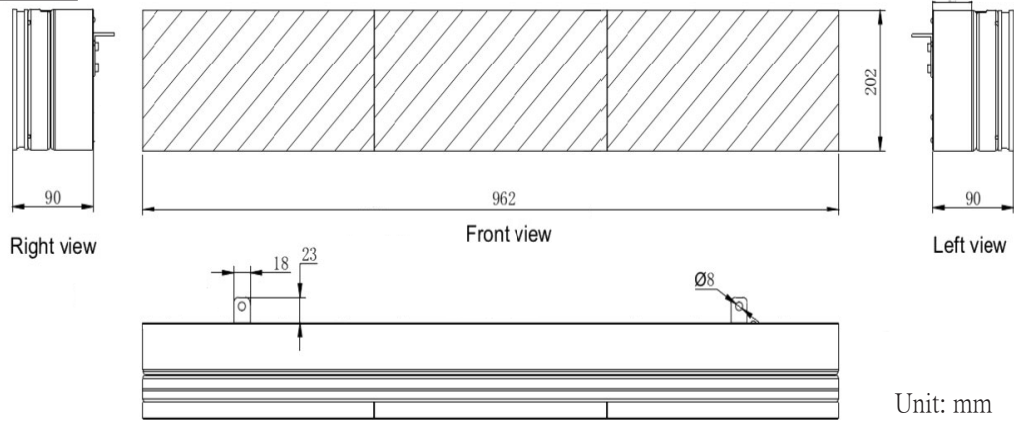

## PSD-210D

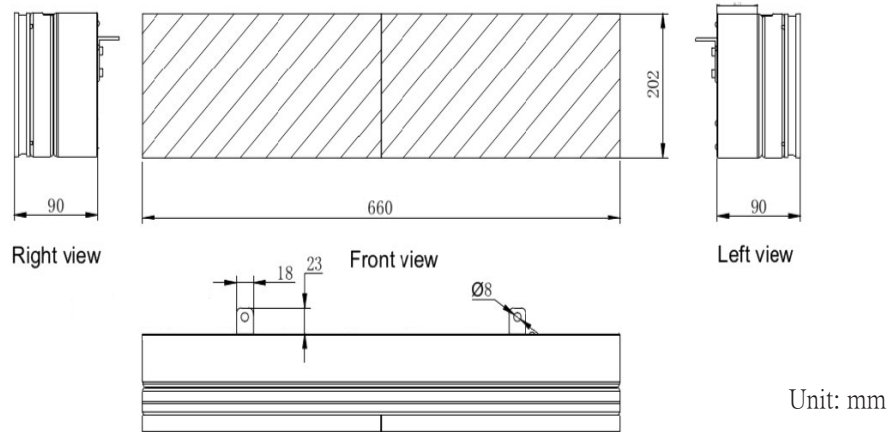

## PSD-110D

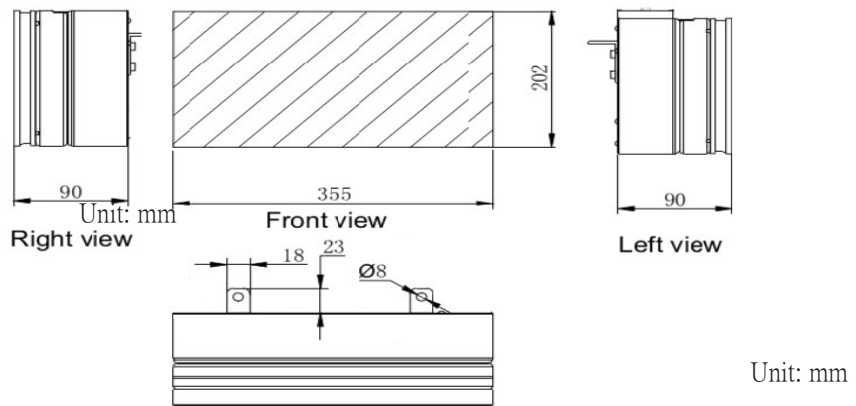

## Related Products



ParkHelper® Parking Space Management Server



ParkCam® Parking space detection camera



CarFinder® Parking Location Finding Server

## Order Information

**PSD-xxx-X**

D: Indoor Model

310, 210, 110



**i-view**  
i-View Communication Inc.

Tel: 886-3-5103001 Fax: 886-3-5103002

Email: support@i-view.com.tw

Website: www.i-view.com.tw